BladeFLASK / Specifications / FAQ / Testimonials

Instructions for use

BladeFLASK 100 | Scalpel Blade Removal System

The scalpel is inserted into the slot in the container until the is heard. The handle is withdrawn & the blade remains sealed inside for later disposal.




Setting up the BladeFLASK and Bracket

The Qlicksmart BladeFLASK scalpel blade remover is designed for single-handed operation and comprises two components - Flask and Bracket.

The bracket is an integral part of the overall system and is supplied separately with instructions including a template to simplify placement.

The mounting bracket is fixed to a wall, bench or trolley at each clean-up site or point of use through a strong, adhesive, double-sided tape is pre-fixed to the rear of the bracket. Additional mounting screws are required should they be required.

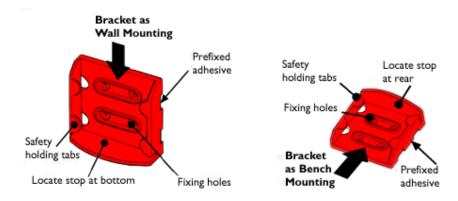


BladeFLASK:

The BladeFLASK unit is then mounted onto the bracket.

To replace or remove the BladeFLASK, simply slide out the old BladeFLASK and slide in the

replacement.

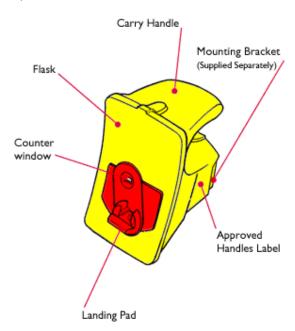

Removing blades using BladeFLASK

The simply safer Qlicksmart method



Place blade flat onto landingPush scalpel handle into Remove handle - Blade BladeFLASK parallel to landing contained in pad - Sharp Edge Right / Tang "UP" pad - Until pronounced CLICKBladeFLASK(removes up to 100 bla